


10Gb/s Coplanar PIN Preamp Receiver


PT10GC

The module consists of a PIN photodetector, a low noise preamplifier, a connectorized single-mode fibre pigtail and a hermetic metal package with coplanar output.

Optimized for use in 10 Gb/s long haul applications, either as a discrete device or within a transponder, using NRZ Modulation.

Features:

- High sensitivity, -18.5 dBm typical
- Surface mount MSA compliant
- Low capacitance high speed InGaAs PIN detector
- Hermetically sealed
- Designed to exceed the requirements of Telcordia GR468-CORE
- Single mode fibre tail
- Compatible with AT10GC APD Receiver
- Output stage limits the signal to typically 1100 mV p-p differential, removing the need for a post amplifier
- RoHS 5/6 compliant 

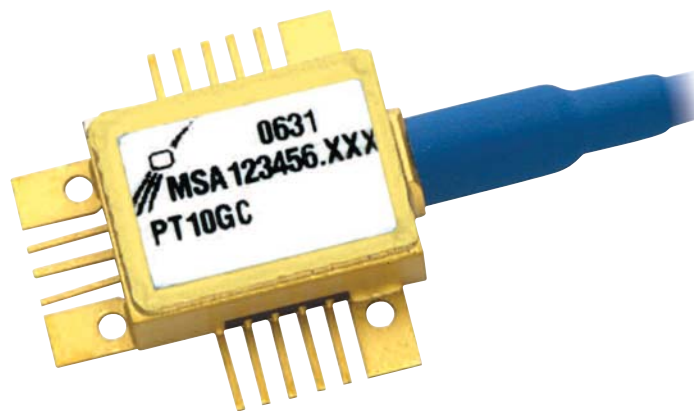

Characteristics

TC = 25°C unless otherwise specified

Parameter	Symbol	Min	Typ	Max	Unit
Optical sensitivity $2^{31}-1$ BER $<10^{-12}$ [4]	Sens		-18.5	-17	dBm
Optical overload $2^{31}-1$ BER $<10^{-12}$	Psat	+1			dBm
High frequency -3 dB corner [2]	f3 dB	8	9.5		GHz
Return loss S22 (400 KHz to 7 GHz)				-8	dB
Pin bias voltage	Vpd		5		V
Dark current	Id			10	nA
PIN responsivity [1]	R	0.7	0.8		A/W
Amplifier bias voltage	Vee		-5.2		V
Amplifier current consumption	Iee		75	90	mA
Transimpedance gain [2,3,5]	TZG	1100	1440	1800	Ohms

- Notes** [1] Optical wavelength between 1525nm – 1575nm.
 [2] Load impedance is 50Ω (AC coupled) with a return loss >20 dB, up to 20 GHz.
 [3] Excludes PIN responsivity.
 [4] Measured with 10 Gb/s NRZ PRBS data and no FEC.
 [5] Differential.

Absolute Ratings

Parameter	Symbol	Min	Max	Unit
Amplifier bias voltage	Vcc	-6	+0.5	V
Operating temperature [1]	Top	-40	85	°C
Storage temperature [2]	Tstg	-40	85	°C
Optical input [3]	po		10	dBm
Fibre bend radius		35		mm
Maximum PIN bias voltage	Vpd		+7.5	V

- Notes (Absolute Ratings):**
 [1] The operating temperature is defined as the temperature of the module case.
 [2] The rating is referred to ambient temperature.
 [3] The optical level that causes no damage to the module. However, the electrical and optical performance specified in this document may not be guaranteed.

Pin Out

Pin #	Symbol	Parameter	Pin #	Symbol	Parameter
1	GND	Case ground	10	Out_P	Positive output
2	Vpd	PIN bias voltage	11	GND	Case ground
3	NC	No connection	12	GND	Case ground
4	Vee	Amplifier Bias	13	FBIN	Offset feedback (if used)
5	NC	No connection	14	NC	No connection
6	GND	Case ground	15	NC	No connection
7	GND	Case ground	16	NC	No connection
8	Out_N	Negative output	17	GND	Case ground
9	GND	Case ground			

Schematic Diagram

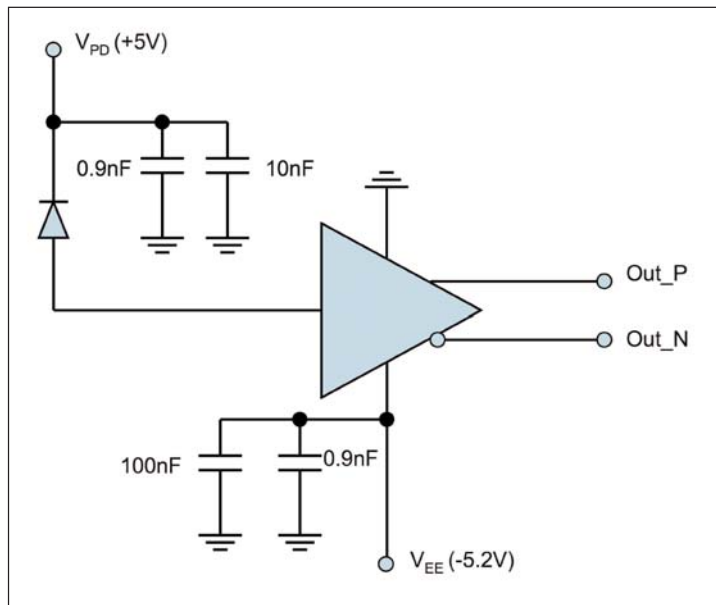


Figure 1: Schematic Diagram

Typical Performance Characteristics

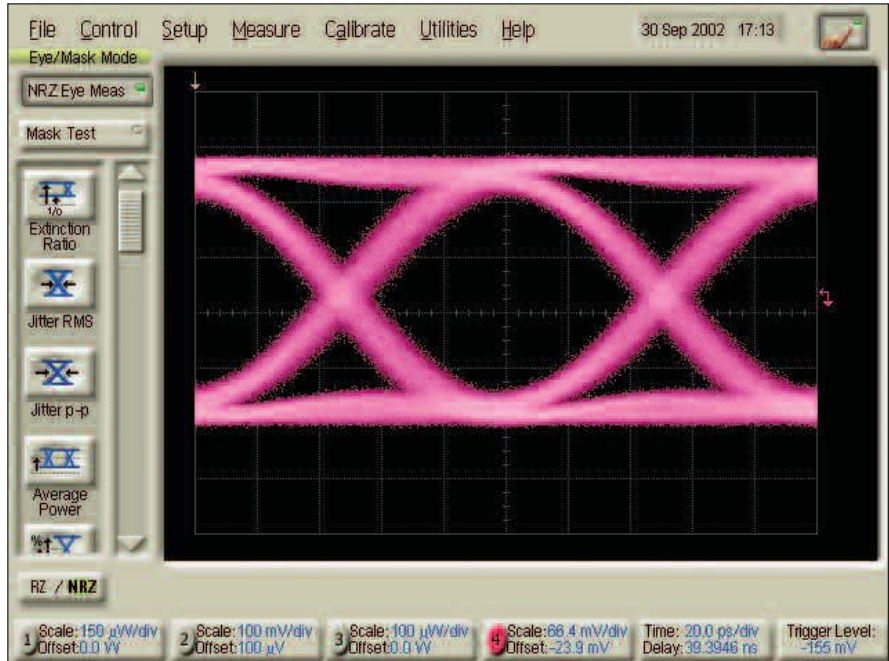


Figure 2: Typical small signal eye diagram measured at 10Gb/s 223-1 PRBS.

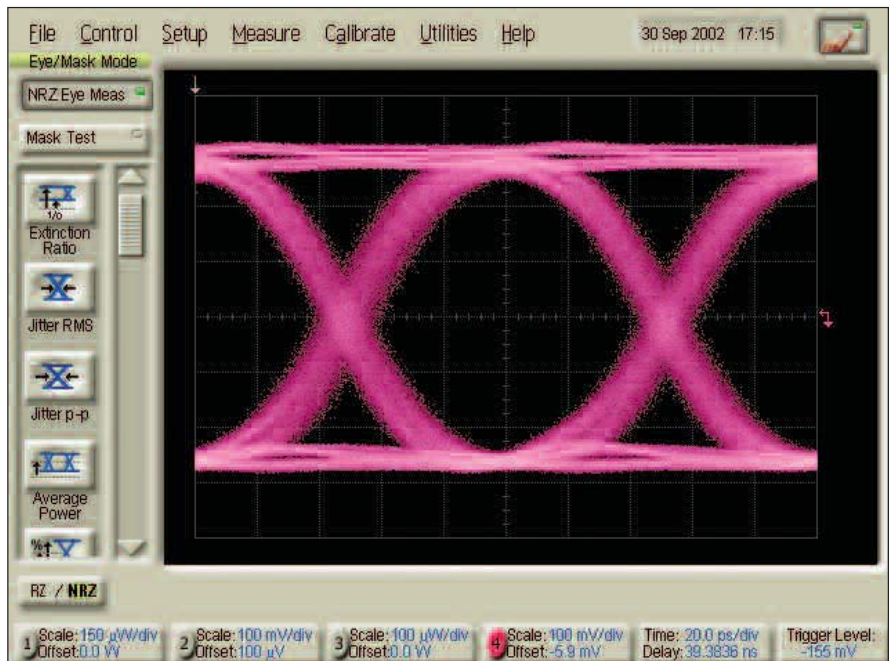


Figure 3: Typical large signal eye diagram measured at 10Gb/s 223-1 PRBS.

Typical Performance Characteristics (continued)

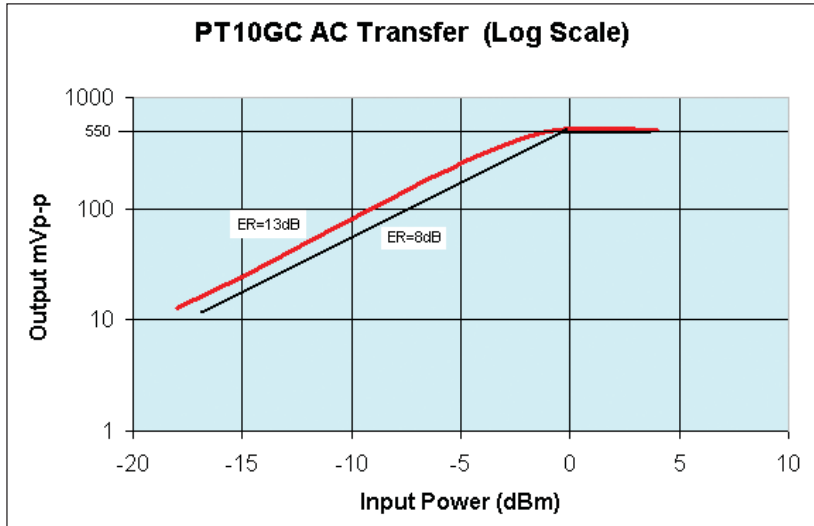


Figure 4: PT10GC AC transfer function.

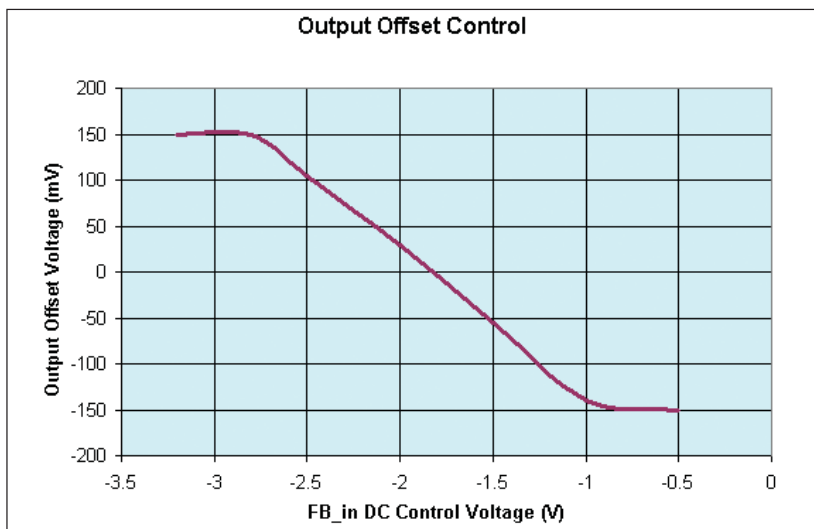


Figure 5: Output DC offset adjust using FB_in (pin 13).

Outline Diagram

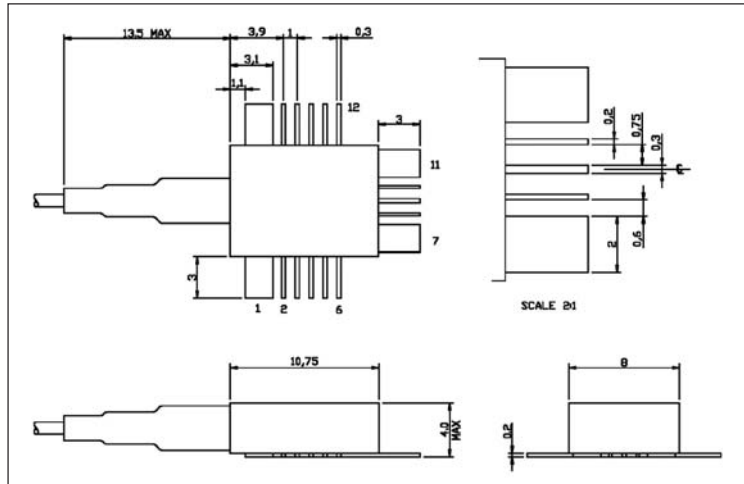


Figure 6: Outline Diagram.

RoHS Compliance



Bookham is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information

PT10GC - (Connector)
 J = SC/PC
 J57 = LC

e.g. PT10GC-J is a PT10GC with an SC/PC connector.

Other options available on request.

Contact Information

North America Bookham Worldwide Headquarters

2584 Junction Ave.
 San Jose
 CA 95134
 USA

- Tel: +1 408 919 1500
- Fax: +1 408 919 6083

www.bookham.com
sales@bookham.com

Europe Paignton Office

Brixham Road
 Paignton
 Devon
 TQ4 7BE
 United Kingdom

- Tel: +44 (0) 1803 66 2000
- Fax: +44 (0) 1803 66 2801

Asia Shenzhen Office

2 Phoenix Road
 Futian Free Trade Zone
 Shenzhen 518038
 China

- Tel: +86 755 33305888
- Fax: +86 755 33305805
 +86 755 33305807

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Bookham before they become applicable to any particular order or contract. In accordance with the Bookham policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Bookham or others. Further details are available from any Bookham sales representative.

