


Final Inspection Report

1. S/O : 1009690
 2. P/N : OFMS1200EHSOR01(Oplink Spec.#3867, Rev.01)
 3. S/N : Z4373670
 4. Configuration:

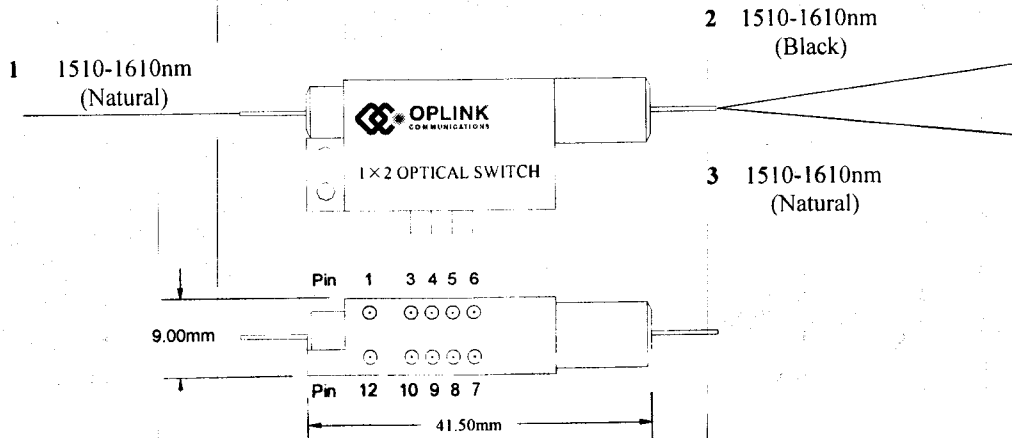

5. Fiber Type: 250µm SMF-28 Bare Fiber
 6. Fiber Length: 1.0 ± 0.1 m
 7. Connectors: Port 1:LC/APC, Port 2&3: None
 8. Performance (@23 ± 3°C, With Connector):

| | | | | | | | | |
|--------------------------|----------------------------------|-------------|------|-------|---------------|--------|--------|---------|
| Operating Wavelength | | 1510-1610nm | | | | | | |
| Max. Insertion Loss (dB) | 1-2 (1510-1610nm,0-70°C,All SOP) | 0.37 | | | | | | |
| | 1-3 (1510-1610nm,0-70°C,All SOP) | 0.65 | | | | | | |
| Max. WDL (dB) | 1-2(1510-1610nm,0-70°C) | 0.08 | | | | | | |
| | 1-3(1510-1610nm,0-70°C) | 0.11 | | | | | | |
| Max. PDL (dB) | 1-2(1550nm,0-70°C) | 0.01 | | | | | | |
| | 1-3(1550nm,0-70°C) | 0.01 | | | | | | |
| TDL (dB) | 1-2(1550nm,0-70°C) | 0.04 | | | | | | |
| | 1-3(1550nm,0-70°C) | 0.08 | | | | | | |
| Crosstalk (dB) | | 65 | | | | | | |
| Return Loss (dB) | | 59 | | | | | | |
| Switching Time (ms) | | ≤10 | | | | | | |
| Operating Voltage (V) | | 4.0~5.0 | | | | | | |
| Optical Path | Electrical Drive | | | | Status Sensor | | | |
| | Pin1 | Pin6 | Pin7 | Pin12 | Pin4-3 | Pin4-5 | Pin9-8 | Pin9-10 |
| 1-2 | V+ | Gnd | N/A | N/A | Open | Closed | Closed | Open |
| 1-3 | N/A | N/A | Gnd | V+ | Closed | Open | Open | Closed |

Checked By: d Date : 07/17/2005