


Final Inspection Report

1. S/O : 1009690
 2. P/N : OFMS1200EHSOR01(Oplink Spec.#3867, Rev.01)
 3. S/N : Z4373542
 4. Configuration:

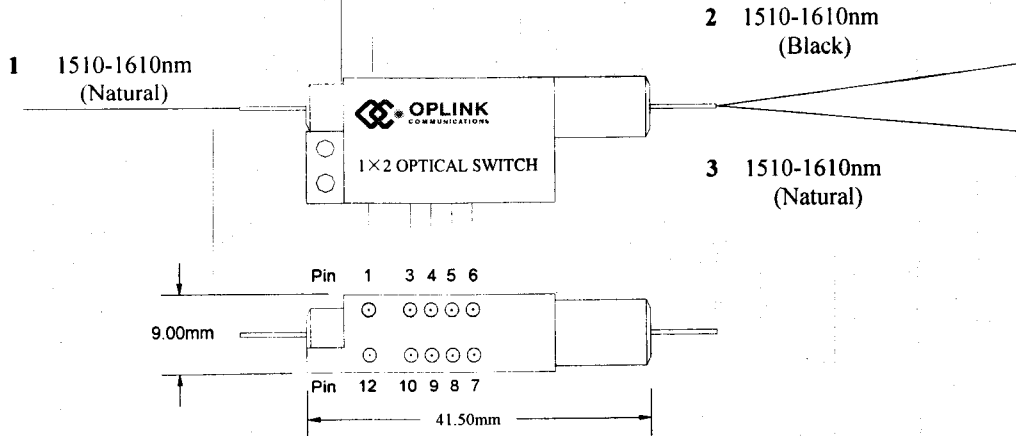

5. Fiber Type: 250µm SMF-28 Bare Fiber
 6. Fiber Length: 1.0 ± 0.1 m
 7. Connectors: Port 1:LC/APC, Port 2&3: None
 8. Performance (@23 ± 3°C, With Connector):

Operating Wavelength		1510-1610nm						
Max. Insertion	1-2 (1510-1610nm,0-70°C,All SOP)							0.52
Loss (dB)	1-3 (1510-1610nm,0-70°C,All SOP)							0.66
Max. WDL (dB)	1-2(1510-1610nm,0-70°C)							0.08
	1-3(1510-1610nm,0-70°C)							0.09
Max. PDL (dB)	1-2(1550nm,0-70°C)							0.03
	1-3(1550nm,0-70°C)							0.01
TDL (dB)	1-2(1550nm,0-70°C)							0.09
	1-3(1550nm,0-70°C)							0.07
Crosstalk (dB)		65						
Return Loss (dB)		58						
Switching Time (ms)		≤10						
Operating Voltage (V)		4.0~5.0						
Optical Path	Electrical Drive				Status Sensor			
	Pin1	Pin6	Pin7	Pin12	Pin4-3	Pin4-5	Pin9-8	Pin9-10
1-2	V+	Gnd	N/A	N/A	Open	Closed	Closed	Open
1-3	N/A	N/A	Gnd	V+	Closed	Open	Open	Closed

Checked By: *fw* Date : 07/21/2005