


## **A370-Type Analog Uncooled Laser Module**

---

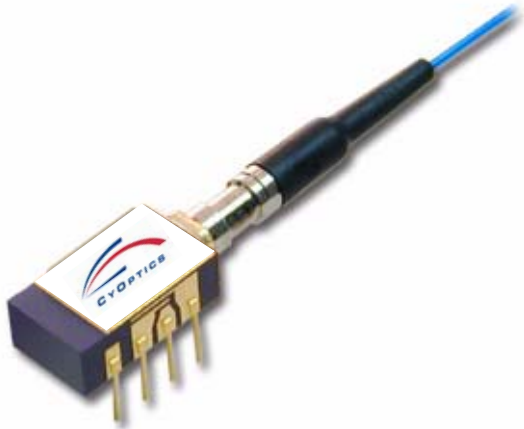

The low-profile, low- cost A370-type analog laser module is ideally suited for CATV applications.

### **Features**

- Eight-pin package suitable for CATV applications
- Frequency range up to 1.0 GHz
- MQW F-P 1.3  $\mu\text{m}$  laser with single-mode fiber pigtail
- Wide operating temperature range:  
–40 °C to +85 °C
- No TEC required
- High output power: typically 1.0 mW power coupled into single-mode fiber
- Hermetically sealed active components
- Internal back-facet monitor
- Qualification program: *Telcordia Technologies*™ TA-983

### **Applications**

- Narrowband video
- Downstream telephony and data
- Return path systems
- Analog and digital modulation systems
- Telecommunications

### **Benefits**

- Easily board mounted
- Requires no lead bending
- No additional heat sinks required
- High output power allows for longer system spans, more fiber splits, and greater tolerance of fiber and connector quality


## Description

The A370-type uncooled laser module consists of a laser diode coupled to a single-mode fiber pigtail. The device is available in a standard, 8-pin configuration (see Figure 1 and/or Table 1) and is ideal for CATV applications.

The module includes a multiquantum-well Fabry-Perot (MQW F-P) laser and an InGaAs PIN photodiode back-facet monitor in an epoxy-free, hermetically sealed package.

The device characteristics listed in this document are met at 1.0 mW output power. Higher- or lower-power operation is possible. Under conditions of a fixed photodiode current, the change in optical output is typically  $\pm 0.5$  dB over an operating temperature range of  $-40$  °C to  $+85$  °C.

This device incorporates the CyOptics Laser 2000 manufacturing process. Laser 2000 is a low-cost platform that targets high-volume manufacturing and tight product distributions on all optical sub-assemblies. This platform incorporates an advanced optical design that is produced on highly automated production lines. The Laser 2000 platform is qualified for the central office and uncontrolled environments, and can be used for applications requiring high performance and low cost.

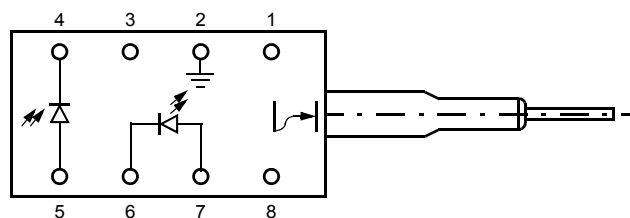

**Figure 1. A370-Type Analog Uncooled Laser Module Schematic, Top View**

**Table 1. Pin Descriptions**

Pin Number	Connection
1	NC
2	Case ground
3	NC
4	Photodiode cathode
5	Photodiode anode
6	Laser diode cathode
7	Laser diode anode
8	NC

## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
Maximum Peak Laser Drive Current or Maximum Fiber Power*	$I_{OP}$ $P_{MAX}$	— —	150 10	mA mW
Peak Reverse Laser Voltage:				
Laser	$V_{RL}$	—	2	V
Monitor	$V_{RD}$	—	20	V
Monitor Forward Current	$I_{FD}$	—	2	mA
Operating Case Temperature Range	$T_C$	$-40$	85	°C
Storage Case Temperature Range	$T_{stg}$	$-40$	85	°C
Lead Soldering Temperature/Time	—	—	260/10	°C/s
Relative Humidity (noncondensing)	RH	—	85	%

\* Rating varies with temperature.

## Handling Precautions

**CAUTION:** This device is susceptible to damage as a result of electrostatic discharge (ESD). Take proper precautions during both handling and testing. Follow guidelines such as JEDEC Publication No. 108-A (Dec. 1988).

CyOptics employs a human-body model (HBM) for ESD-susceptibility testing and protection-design evaluation. ESD voltage thresholds are dependent on the critical parameters used to define the model. A standard HBM (resistance = 1.5 k $\Omega$ , capacitance = 100 pF) is widely used and can be used for comparison purposes.

## Laser Safety Information

### Class IIb Laser Product


FDA/CDRH Class IIb laser product. All versions are Class IIb laser products per CDRH, 21 CFR 1040 Laser Safety requirements. All versions are classified Class 3B laser products consistent with IEC<sup>®</sup> 60825-1: 1993. This device family has been classified with the FDA under accession number 8720010. Measurements were made to classify the product per IEC 60825-1: 1993.

This product complies with 21 CFR 1040.10 and 1040.11.  
8.3  $\mu$ m single-mode pigtail or connector  
Wavelength = 1.3  $\mu$ m  
Maximum power = 10 mW

Because of size constraints, laser safety labeling is not affixed to the module but attached to the outside of the shipping carton.

Product is not shipped with power supply.

**Caution:** Use of controls, adjustments, and procedures other than those specified herein may result in hazardous laser radiation exposure.

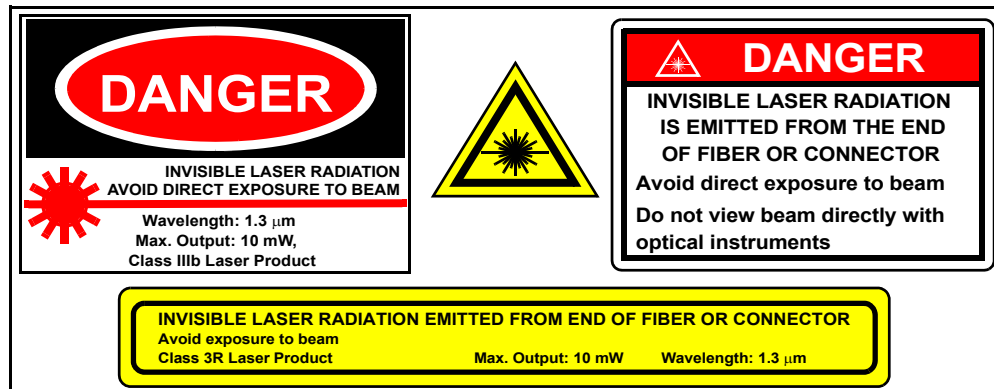

## Electrical/Optical Characteristics

**Table 2. Electrical/Optical Characteristics** (over operating temperature range unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Operating Temperature Range	T <sub>OP</sub>	—	−40	—	85	°C
Optical Output Power	P <sub>F</sub>	CW, nominal	—	1	—	mW
Threshold Current	I <sub>TH</sub>	T = 25 °C T = full range	4.5 1	9 —	15 45	mA mA
Drive Current Above Threshold	I <sub>MOD</sub>	CW, P <sub>F</sub> = 1.0 mW, T = 25 °C CW, I <sub>MON</sub> = constant, T = full range	20 15	30 —	40 70	mA mA
Slope Efficiency	SE	CW, P <sub>F</sub> = 1.0 mW, T = 25 °C	25	—	50	μW/mA
Center Wavelength	λ <sub>C</sub>	P <sub>F</sub> = 1.0 mW, CW	1270	—	1350	nm
RMS Spectral Width	Δλ	P <sub>F</sub> = 1.0 mW	—	2	3	nm
Tracking Error	TE	I <sub>MON</sub> = constant, CW	—	0.5	±1	dB
Forward Voltage	V <sub>F</sub>	CW	—	1.1	1.6	V
Input Impedance	R	—	3	—	8	Ω
Monitor Current	I <sub>MON</sub>	V <sub>R</sub> * = 5 V	400	—	1200	μA
Monitor Dark Current	I <sub>D</sub>	V <sub>R</sub> * = 5 V	—	10	200	nA
Wavelength Temperature Coefficient	—	—	—	0.4	0.5	nm/°C

\* V<sub>R</sub> = reverse voltage.

## Electrical/Optical Characteristics (continued)

### Analog Operation

The A370-series laser module can be used in a wide variety of analog operations. These may include several channels of pure video signals, or a mix of video signals with digital data channels riding on analog carriers. It is difficult to prepare a single battery of testing conditions that will satisfy all applications. The following table contains a set of testing conditions that CyOptics believes will give a broad indication of the performance of the A370-series laser module.

The distortion characteristics are measured using a two-tone test. The frequencies are 13 MHz and 19 MHz. The second-order distortion components are measured at  $f_1 + f_2 = 32$  MHz and  $f_1 - f_2 = 6$  MHz. All third-order distortion components are measured in the frequency range of 5 MHz—200 MHz, and they meet the required level.


**Table 3. Analog Characteristics**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Power	P <sub>O</sub>	CW, T = -40 °C to +85 °C	—	1.0	—	mW
Relative Intensity Noise	RIN	CW, Freq. = 5 MHz to 300 MHz; no fiber loss, T = 25 °C	—	-140	-130	dB/Hz
Modulation Bandwidth	BW	-3 dB, T = -40 °C to +85 °C	1.0	—	—	GHz
Second-order Distortions	—	T = 25 °C, OMI = 0.2; Two-tone test: f <sub>1</sub> = 13 MHz, f <sub>2</sub> = 19 MHz; 20 km of fiber, (7 dB loss) plus connector loss, f <sub>1</sub> ± f <sub>2</sub>	—	-48 -50*	-40 -45*	dBc dBc
Third-order Distortions	—	T = 25 °C, OMI = 0.2; Two-tone test: f <sub>1</sub> = 13 MHz, f <sub>2</sub> = 19 MHz; 20 km of fiber (7 dB loss), plus connector loss, all peaks from 5 MHz—50 MHz meet this level	—	-60	-50	dBc
RF Bandpass Flatness	B <sub>P</sub> F	Peak to valley: 5 MHz to 200 MHz	—	—	1.0	dB
Spurious Noise	N <sub>SP</sub>	T = 25 °C, OMI = 0.2; ref. to one-tone: 5 MHz to 50 MHz, 20 km of fiber, (7 dB loss) plus connector loss	—	-58	-54	dBc
Spurious Noise (carrier off)	N <sub>SP</sub>	T = 25 °C	—	-45 -45*	-37 -40*	dBc dBc

\* Premium performance (see Table 5 for ordering information).

## Outline Diagram

Dimensions are in inches and (millimeters).

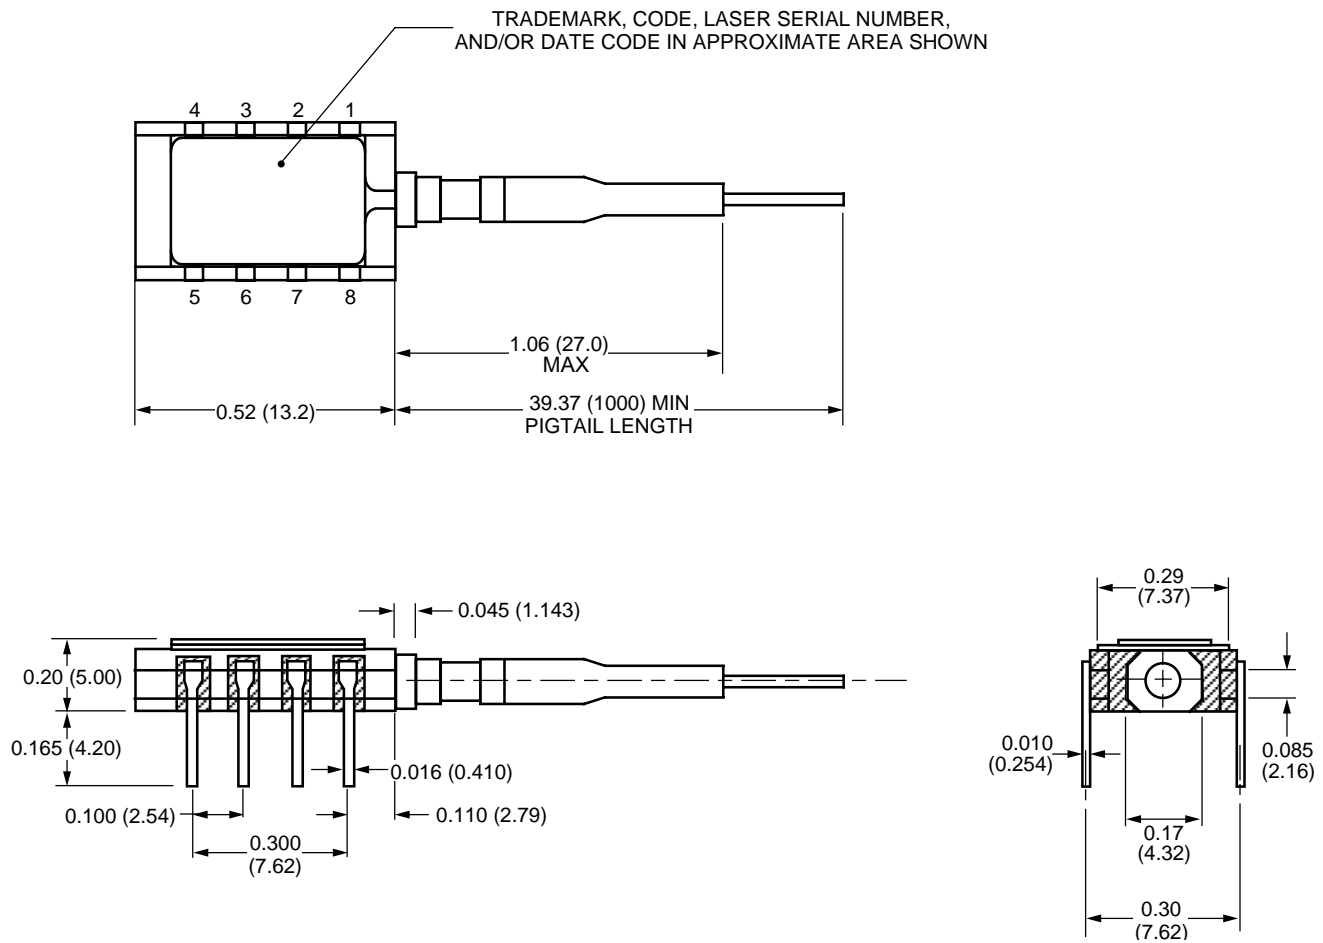

## Qualification Information

The A370-Type Laser Module has passed the following qualification tests and meets the intent of *Telcordia Technologies* TR-NWT-000468 for interoffice environments and TA-TSY-000983 for outside plant environments.

**Table 4. A370-Type Laser Module Qualification Test Plan**

Qualification Test	Conditions	Sample Size	Reference
Mechanical Shock	500 G	11	MIL-STD-883 Method 2002
Vibration	20 g, 20 Hz—2,000 Hz	11	MIL-STD-883 Method 2007
Solderability	—	11	MIL-STD-883 Method 2007
Thermal Shock	Delta T = 100 °C	11	MIL-STD-883 Method 2003
Fiber Pull	1 kg; 3 times	11	<i>Telcordia Technologies</i> 983
Accelerated (Biased) Aging	85 °C, 5,000 hrs.	25	<i>Telcordia Technologies</i> 983 Section 5.18
High-temperature Storage	85 °C, 2,000 hrs.	11	<i>Telcordia Technologies</i> 983
Temperature Cycling	500 cycles	11	<i>Telcordia Technologies</i> 983 Section 5.20
Cyclic Moisture Resistance	10 cycles	11	<i>Telcordia Technologies</i> 983 Section 5.23
Damp Heat	40 °C, 95% RH, 1,344 hrs.	11	MIL-STD-202 Method 103
Internal Moisture	<5,000 ppm water vapor	11	MIL-STD-883 Method 1018
Flammability	—	—	TR357 Sec. 4.4.2.5
ESD Threshold	—	6	<i>Telcordia Technologies</i> 983 Section 5.22

## Ordering Information

**Table 5. Ordering Information**

<b>Code</b>	<b>Comcode</b>	<b>Pfiber</b>	<b>Connector</b>	<b>Performance Option</b>
A370-10A	108009150	1.0 mW	SC-PC	Standard
A370-10F	108013954	1.0 mW	FC-PC	Standard
A370-10B	108024183	1.0 mW	SC-APC	Standard
A370-10G	108061839	1.0 mW	FC-APC	Standard
A370-10N	108013962	1.0 mW	none	Standard
A370-11A	108225384	1.0 mW	SC-PC	Premium
A370-11F	108225392	1.0 mW	FC-PC	Premium

*Telcordia Technologies* is a trademark of Telcordia Technologies, Inc.  
*IEC* is a registered trademark of The International Electrotechnical Commission.

For additional information, contact your CyOptics Account Manager or the following:

INTERNET: <http://www.cyoptics.com>  
Telephone: 484-397-3800  
Fax: 484-397-3592  
Email: <mailto:sales@cyoptics.com>  
Info Email: <mailto:sales@cyoptics.com>

*The information enclosed (including but not limited to technical specifications, recommendations, and application notes) relating to the products herein is believed to be reliable and accurate and is subject to change without notice. No risk and liability is assumed for use of the products and its applications. CyOptics, Inc. reserves the right to change without notice design, specification, form, fit or function relating to the products herein.*

Copyright © 2005 CyOptics, Inc.  
All Rights Reserved

October 2005  
DS06-001 (Replaces DS05-001)

