



Pump Module Data Sheet

Serial Number
Product Code
Chip ID







SC792663
LC96Z220A-74
85436T-Y0915

Operating Power (mW) 200
Operating Current (mA) 363.60
(Assumes a nominal 10% aging allowance)

Case temperature and Laser submount temperature 25°C, unless stated otherwise

Kink-free Current (mA)	397.55	RMS Centre Wavelength (nm)	974.19
Kink-free Power (mW)	220.00	RMS Spectral Width @ 13dB (nm)	0.20
Threshold Current (mA)	45.60	TEC Current @ IMAX, 75°C (A)	1.45
Forward Voltage @ IMAX	1.75	TEC Voltage @ IMAX, 75°C (V)	1.93
Monitor Dark Current (nA)	2.90	Thermistor Resistance (KOhms)	10.09
Monitor Responsivity (µA/mW)	4.90		

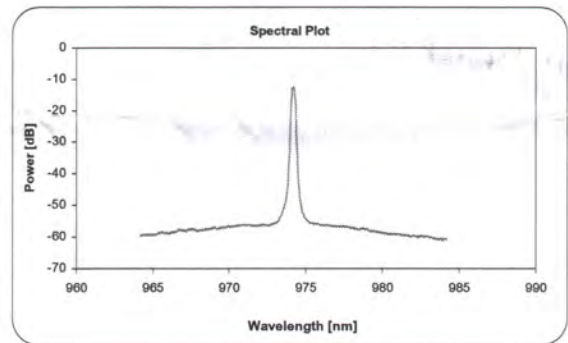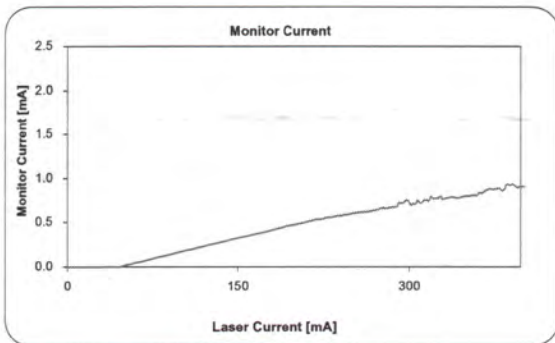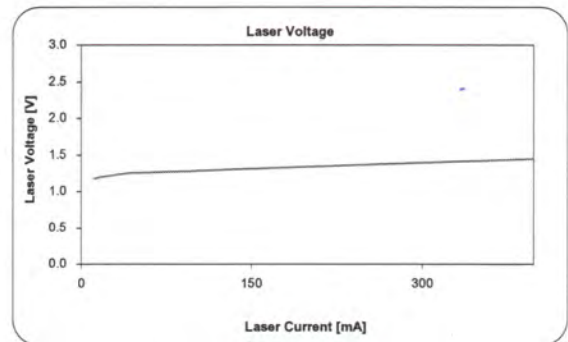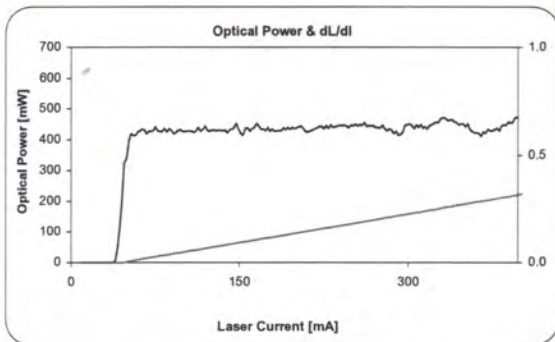

Fibre Power (mW)	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330
Forward Current (mA)	333.5	349.4	365.4	381.5	397.6											
Fibre Power (mW)	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490
Forward Current (mA)																
Fibre Power (mW)	500	510	520	530	540	550	560	570	580	590	600					
Forward Current (mA)																

Date and Time 03 Mar. 2016 19 : 43 : 30
Node 573
Operator ID 005182
Software Version 3.04.84

